



NOVOFOLD SPEED-DOOR TECHNICAL QUESTIONNAIRE

CLIENT:
REF.:
DATE:
FINAL CLIENT / DELIVERY ADDRESS:

ORDER (Send it to ventas4@novofermalsal.com)
OFFER
QUANTITY:

TECHNICAL DATA

DIMENSIONS:

L (Width): mm
H (Height): mm
DX: 220 mm
SX: 220 mm
DX/SX: 220 + 300 (drive on the side) mm
h: 1070 mm
A: 626 mm
a: 256 mm

STRUCTURE:

Standard RAL 7011 RAL 9016 (only with RAL 9016 curtain)
Other colour RAL: PVC side seals Guides with holes

Installation place:

Inside Outside Inside the hole
(will be discounted 10mm high and 20mm wide)

CURTAIN:

Colour (900 gr/m²):

White 9016 Blue5005
Yellow 1003 Blue 5002
Orange 2004 Grey 7038
Red 3002 Grey 7016
Green 6026 Black 9005

Standard: 2 rows of windows

Insect net windows instead of transparent PVC

Logo: Yes (Send it attached if is not the Novoform Logo)
No

DRIVE + BOX CONTROL:

Standard 13.100 FU (max. 5000x5000)
(Cover over drive included except inside side)
Standard: Box control TS 971 Black TS 981
Orange

Left on the front
Right on the front
TS 971 + 1000 mA

Left on the side
Right on the side
(Mandatory for width over 5,5 m or 28 m²)

ACCESORIES:

Standard: Photocell
Standard: Security band
Emergency stop On box control
Push button
Mushroom push button
Push button up-stop-down
Pull switch Support bar mm
Light curtain
Radioband
Inductive loop detector 1 side 2 sides
Radar Falcon (motion sensor)
Radar Condor (motion and presence sensor)
Flash lights
Remote control 2 channel 4 channel
Main switch on box control
Switch on key operated on box control



INSTALLATION IN:

Iron Concrete Other:

LANGUAGE OF THE MANUALS:

Spanish English French Dutch German

Other accessories and comments:

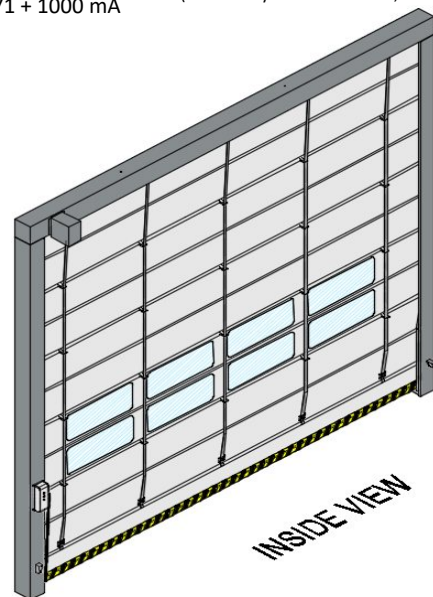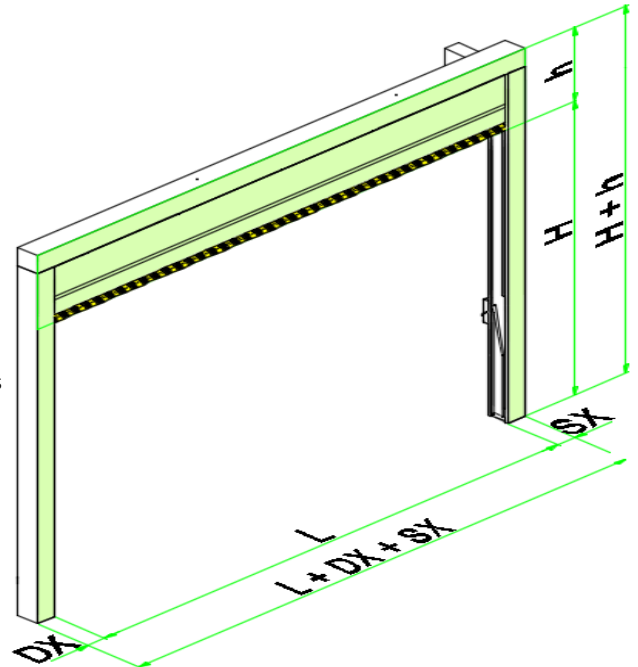

Completed by the client:

Date and signature:

2024 - V 1.0